






Panel Light Wi-Fi

LARKIN



All sides are lined with LED's to grant optimal illumination.
 High light output at a reduced energy consumption of up to 50%.
 Over 40000 hours life expectancy. Wide angle of deflection with even light distribution.
 No start-up delay, no flickering, no humming.
 High efficiency (95%) constant current driver with built-in overheat protection that remains stable at a wide range of input voltages.
 Independent LED circuit design prevents complete blackout in case an LED fails.
 Causes no electromagnetic interference.
 Operating Temperature: -20°C to +40°C
 Humidity Operating: 10-80%,
 Product weight: 6.1kg

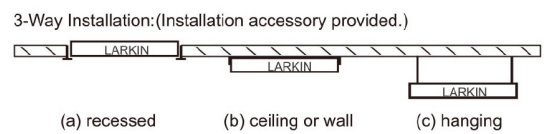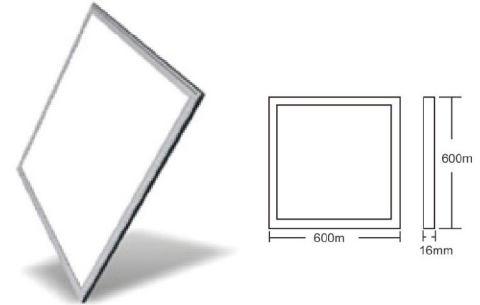

Brightness


Steplessly set your desired brightness with wiping movements on the display. Individual setting for each lamp or luminaire or according to personally set groups.

Light color

Steplessly set your desired light color from the complete RGB spectrum with wiping movements on the display. Individual setting for each lamp or luminaire or according to personally set groups.

Color temperature

Do you prefer bright, invigorating white or cozy, warm white? Steplessly select your desired color temperature with wiping movements on the display. Individual setting for each lamp or luminaire or according to personally set groups.

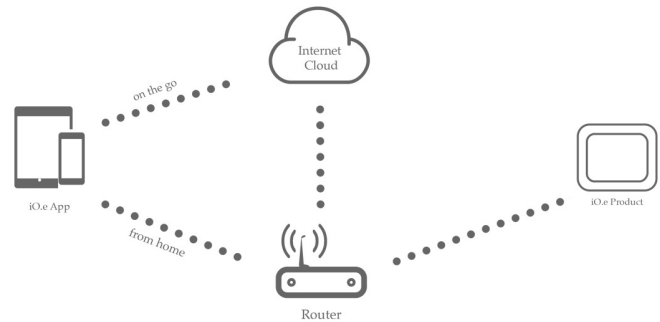

Mobile App now available at **Apple iOS & Android**



| Code | Model | Voltage | Rated Power | CCT | CRI | Lumen | Dimmable |
|-----------|------------|----------|-------------|------------|-----|--------|----------------|
| io-204001 | LK-38 | 100-240V | 38W | 4000K | 80 | 3000lm | No |
| io-204002 | LK-45 | 100-240V | 45W | 4000K | 80 | 3600lm | No |
| io-204003 | LK-WIFI-D | 100-240V | 40W | 4000K | 80 | 3800lm | Brightness |
| io-204004 | LK-WIFI-DW | 100-240V | 40W | 3000-6000K | 80 | 3800lm | CCT&Brightness |