


Damp-Proof Light LED



| Model NO. | io-104007 io-104008 io-104009 | io-104010 io-104011 io-104012 |
|---------------------------|-------------------------------------|-------------------------------------|
| LED Type | SMD3528 | SMD3528 |
| LED Q'TY | 602 | 301 |
| Beam Angle | 120° | 120° |
| Minimum Luminous Flux(lm) | 2800 | 1372 |
| Voltage | 110-240V | 110-240V |
| Environmental Temperature | -20°C~60°C | -20°C~60°C |
| Environmental Humidity | 0%~95% | 0%~95% |
| Safety Class | II | II |
| Safety Type | IP65 | IP65 |
| Material | PC | PC |
| Driver | Included | Included |
| Pcs/Carton | 4 | 4 |
| Carton Dimensions(cm) | 127×23×20 | 127×23×20 |
| 20'/40'/40HQ(pcs) | 1996/4064/4756 | 1996/4064/4756 |

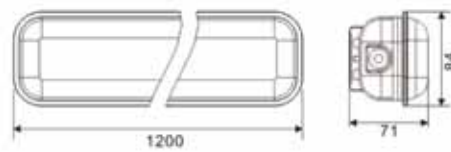

IP65

Certification: CE,EMC,LVD

- Normal Model: io-104007(40W) ;io-104010(20W)
- Microwave Sensor:io-104008(40W) ;io-104011(20W)
- Emergency Model: io-104009(40W) ;io-104012(20W)



IP65

Certification: CE,EMC,LVD

- Normal Model: io-104013(20W) ;io-104015(12W)
- Microwave Sensor: io-104014(20W) ;io-104016(12W)

| Model NO. | io-104013 io-104014 | io-104015 io-104016 |
|---------------------------|------------------------|------------------------|
| LED Type | SMD3528 | SMD3528 |
| LED Q'TY | 280 | 144 |
| Beam Angle | 120° | 120° |
| Minimum Luminous Flux(lm) | 1327 | 760 |
| Voltage | 110-240V | 110-240V |
| Environmental Temperature | -20°C~60°C | -20°C~60°C |
| Environmental Humidity | 0%~95% | 0%~95% |
| Safety Class | II | II |
| Safety Type | IP65 | IP65 |
| Material | PC | PC |
| Driver | Included | Included |
| Pcs/Carton | 9 | 9 |
| Carton Dimensions(cm) | 67×33.5×29 | 67×33.5×29 |
| 20'/40'/40HQ(pcs) | 4005/8163/9549 | 4005/8163/9549 |