


Damp-Proof Light LED



Model NO.	io-104007 io-104008 io-104009	io-104010 io-104011 io-104012
LED Type	SMD3528	SMD3528
LED Q'TY	602	301
Beam Angle	120°	120°
Minimum Luminous Flux(lm)	2800	1372
Voltage	110-240V	110-240V
Environmental Temperature	-20°C~60°C	-20°C~60°C
Environmental Humidity	0%~95%	0%~95%
Safety Class	II	II
Safety Type	IP65	IP65
Material	PC	PC
Driver	Included	Included
Pcs/Carton	4	4
Carton Dimensions(cm)	127×23×20	127×23×20
20'/40'/40HQ(pcs)	1996/4064/4756	1996/4064/4756

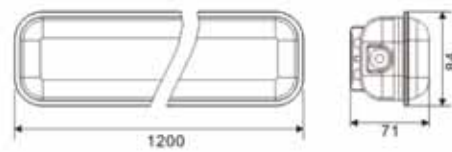

IP65

Certification: CE,EMC,LVD

- Normal Model: io-104007(40W) ;io-104010(20W)
- Microwave Sensor:io-104008(40W) ;io-104011(20W)
- Emergency Model: io-104009(40W) ;io-104012(20W)



IP65

Certification: CE,EMC,LVD

- Normal Model: io-104013(20W) ;io-104015(12W)
- Microwave Sensor: io-104014(20W) ;io-104016(12W)

Model NO.	io-104013 io-104014	io-104015 io-104016
LED Type	SMD3528	SMD3528
LED Q'TY	280	144
Beam Angle	120°	120°
Minimum Luminous Flux(lm)	1327	760
Voltage	110-240V	110-240V
Environmental Temperature	-20°C~60°C	-20°C~60°C
Environmental Humidity	0%~95%	0%~95%
Safety Class	II	II
Safety Type	IP65	IP65
Material	PC	PC
Driver	Included	Included
Pcs/Carton	9	9
Carton Dimensions(cm)	67×33.5×29	67×33.5×29
20'/40'/40HQ(pcs)	4005/8163/9549	4005/8163/9549