


Downlight LED

CELAN



Input Voltage:220-240V,50-60Hz

The CELAN is available in three different armature sizes.It can be rotated in any direction.The armatures are also available with a dimmable driver.

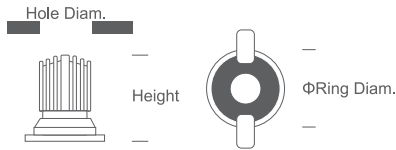

	Celan 50	Celan 60	Celan 80
Code	io-202001	io-202002	io-202003
lm	180lm	280lm	410lm
Hole Diam.	49mm	59mm	79mm
Height	78mm	91mm	88mm
Ring Diam.	64mm	76mm	96mm
warm white	6W,30mA	8W,40mA	12W,60mA
cool white	5W,25mA	6W,30mA	9W,45mA


Downlight LED

HOMS


The HOMS are Integrated LED downlight powered by an OSRAM OSOLON LED.They are available in two color temperatures 3000K and 4000K.

The HOMS represent the latest in downlight technology.


Standard kit supplied include 1 spot or 3 spots however specific wiring solutions and kit available on request.




HOMS S 500



HOMS S 300



HOMS XS 200



HOMS XXS 100

Code	io-202004	io-202005	io-202006	io-202007
IP Level	IP23	IP23	IP23	IP44
Light	OSRAM OSOLON Power LED	OSRAM OSOLON Power LED	OSRAM OSOLON Power LED	OSRAM OSOLON Power LED
Power	12W(14W with driver)	5.6W	3.5W	1.8W
Lifetime	30 000hrs	30 000hrs	30 000hrs	30 000hrs
K	3 000K and 4 000K	3 000K and 4 000K	3 000K and 4 000K	3 000K and 4000K
Beam	35°/60°	25°	20°	40°
lm	460lm	300lm	200lm	100lm
Light Intensity	1000cd(35°)and450cd(60°)	500cd	500cd	130cd
Available Finishes	White,Brushed Aluminum	White,Brushed Aluminum	White,Brushed Aluminum	Chrome,Brushed Aluminum