

Louvre Light PL Fluorescent




High quality steel painted by UV-proof powder body with color white,highly polished aluminum parabolic louvre.IP20 for degree of protection.

220V-240V/50Hz of rated voatage.Option for materials of reflector.Option for I type grid or V type grid .Electronic/magnetic ballast,possibility of installation emergency electro inverter,or dimmable ballast.

IP20



■ LV-236H/PL
LV-428H/PL

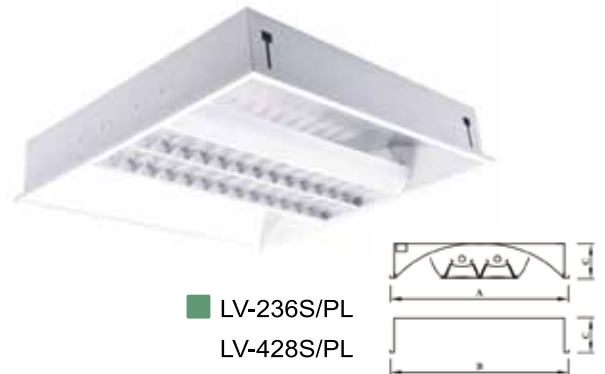

■ LV-236S/PL
LV-428S/PL

Code	Model	Circuit Wattage	Grid spacing W×L(mm)	A×B×C(mm)	Code	Model	Circuit Wattage	Grid spacing W×L(mm)	A×B×C (mm)
io-204014	LV-236H/PL	2×36W PL	600×600	595×595×110	io-204016	LV-236S/PL	2×36W PLL	600×600	595×595×110
io-204015	LV-428H/PL	4×28W PL	600×1500	595×1195×52	io-204017	LV-428S/PL	4×28W PLL	600×1200	595×1195×60

Louvre Light T8 Fluorescent IP54


High quality steel painted by UV-proof powder body with color white,highly polished aluminum parabolic louvre.IP20 for degree of protection.

220V-240V/50Hz of rated voatage.Option for materials of reflector.Option for I type grid or V type grid .Electronic/magnetic ballast,possibility of installation emergency electro inverter,or dimmable ballast.

IP54



■ LV-420HIP

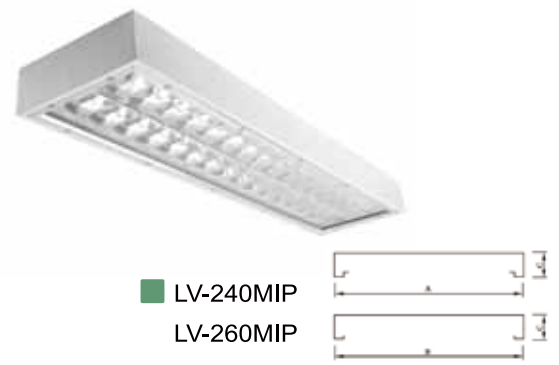

■ LV-240MIP
LV-260MIP

Code	Model	Circuit Wattage	Grid spacing W×L(mm)	A×B×C(mm)	D(mm)	Code	Model	Circuit Wattage	Grid spacing W×L(mm)	A×B×C (mm)
io-204018	LV-420HIP	4×20W	600×600	595×595×80	626	io-204019	LV-240MIP	2×40W	300×1230	300×1230×110
						io-204020	LV-260MIP	2×60W	300×1530	300×1530×110